
FUTURO Homebox



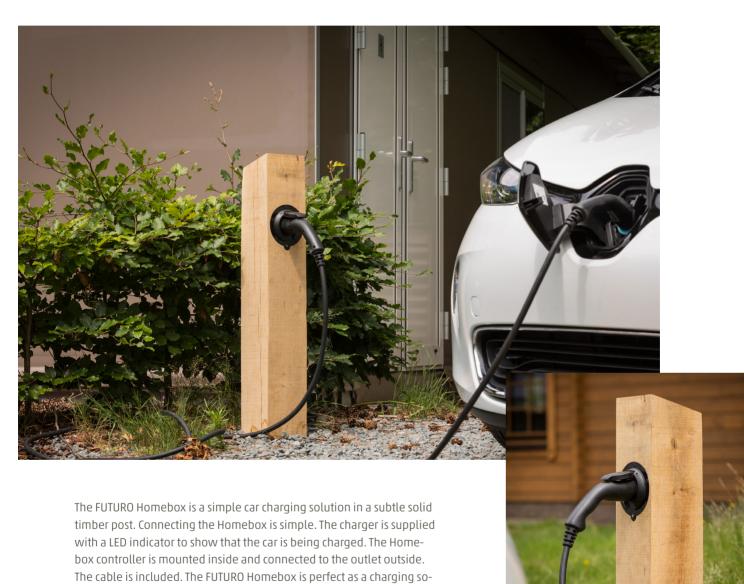

please contact us.

lution at your home. For more information about the FUTURO Homebox,

SPECIFICATIONS

• IP grade: IP54

• Temperature range in operation: -25 to 40°C

• Voltage: Single- or three-phase power, 230V-400V, 16A or 32A

• Cable: 3 x 2.5mm² or 5 x 6mm²

• Socket type: Type 2

• Status information: Blue LED on outlet

• **Lifespan:** Every type of wood has its own durability class. More information can be found at "Wood species" & "Sustainability".

OPTIONS

• Dimensions: 150mm

• Wood species: Oak, chestnut or Accova

• Certification: FSC or PEFC

• Variations : All Timberlab products are unique. In addition to our standard options, we offer customization. Think of adding

logos, sockets or different dimensions.








Only products indicated with the FSC® claim are FSC certified and come with our FSC-certificate number NC-COC-029615-KE. Only products indicated with the PEFC™ claim are 100% PEFC certified and come with our PEFC-certificate number NC-PEFC/COC-029615-FJ.

DIMENSIONS AND WEIGHT

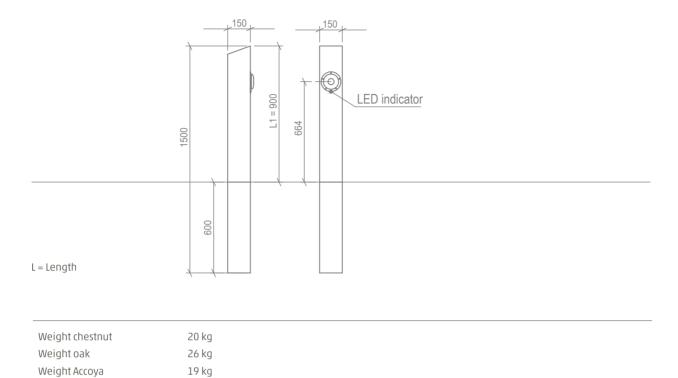

CO2 storage chestnut	33 kg
CO2 storage oak	41 kg
CO2 storage Accoya	30 kg

PRODUCT CODE GENERATOR

Product family	Wood species	Certification	In ground / post support	Colour temp.	Туре	Voltage	Variations
XX	X	Х	XX	Χ	Х	Х	XX
79= FUTURO Homebox	2= Chestnut 3= Oak 4= Accoya	0= N.a. 1= FSC 2= PEFC	00= Length 1 + 600mm in ground	0= N.a.	0= 32mm hole	1= 230 V	00

EXAMPLE

Futuro Homebox, Oak, Length 1 + 600mm in ground, 32mm hole, 230V

Product code: 79300000100