
FUTURO Wallbox

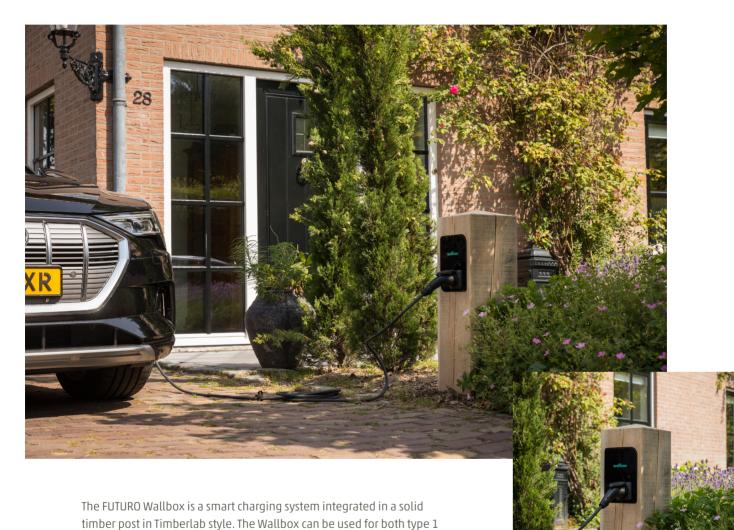

timberlab
natural outdoor solutions

about the FUTURO Wallbox, please contact us.

and type 2 cars and is suitable for many locations. A great solution for your (holiday) home, parking lot or business premises. You can easily keep track of the charging status via an App. For more information

SPECIFICATIONS

• IP grade: IP54 / IK08

• Temperature range in operation: -25 to 40°C

• Voltage: 230V/7,4kW 32A - 400V/11kW 16A - 400V/22kW 32A

• Cable: 5 x 6mm2 • Socket type: Type 2

• Interface: Wi-Fi / Ethernet / Bluethooth

• Status information: RGB-LED/Wallbox-app&portal

• Included: Power Sharing Smart

• **Lifespan:** Every type of wood has its own durability class. More information can be found at "Wood species" & "Sustainability".

OPTIONS

• Plug: Type 1 or 2
• Certification: PEFC

• Variations: All Timberlab products are unique. In addition to our standard options, we offer customization. Think of adding logos, sockets or different dimensions.








Only products indicated with the FSC® claim are FSC certified and come with our FSC-certificate number NC-COC-029615-KE. Only products indicated with the PEFC™ claim are 100% PEFC certified and come with our PEFC-certificate number NC-PEFC/COC-029615-FJ.

DIMENSIONS AND WEIGHT

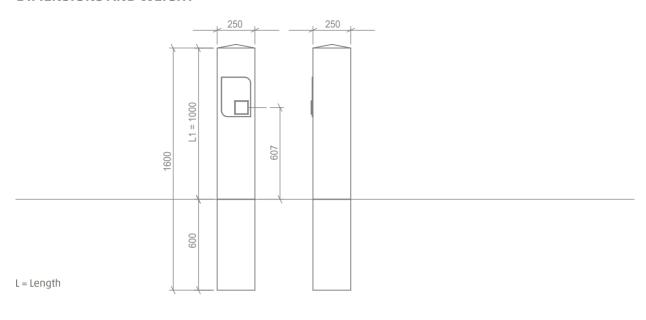

Weight oak

50 kg

CO2 storage oak

77 kg

PRODUCT CODE GENERATOR

Product family	Wood species	Certification	In ground / post support	Colour temp.	Туре	Voltage	Variations
XX	Χ	Χ	XX	Χ	X	Χ	XX
78= FUTURO Wallbox	3= 0ak	0= N.a. 2= PEFC	00= Length 1 + 600mm in ground	0= N.a.	0= 32mm hole	1= 230/ 400 V	00

EXAMPLE

FUTURO Wallbox, Oak, Length 1 + 600mm in ground,32mm hole, 230V

Product code: 78300000100