


RIPARO

Unique in both functionality and design. The RIPARO is made of solid Accoya wood that has been laminated. Perfectly suited to outdoor spaces where durability, design and a natural look are key. The RIPARO is widely applicable. From boulevard to forest path, and from driveway to public road. Because of its steel fixture, lots of variation in optics is possible. The optics are specially designed to ensure that the user is not blinded.

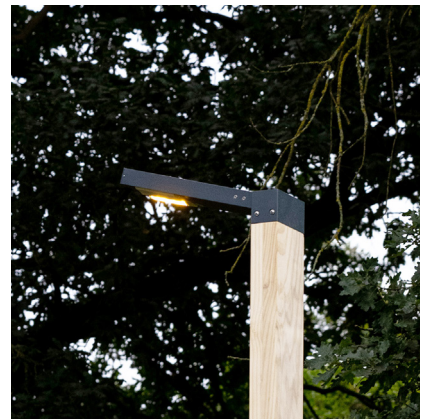


SPECIFICATIONS

- **IP class:** IP54
- **Thickness:** 190 x 90 mm
- **Voltage:** 230 volts
- **Power per LED module:** 35 Watt
- **Lumen output per LED module:** 3.000K = 3.697 lm
4.000K = 3.975 lm
- **Beam angle:** The LED module has a beam angle of 130x85 degrees
- **Lifespan:** Every type of wood has its own durability rating. More information about this can be found under "Types of wood" & "Sustainability". The LED module has an expected lifespan of 60,000 hours.
- **Lighting data:** Lighting data available on request.

OPTIONS

- **Wood type:** Accoya
- **Quality mark:** FSC
- **Accessories:** The RIPARO is available with or without post holder. See chapter 'post holders' for all technical data of the different post holders.
- **Light colour:** Available in 3.000 and 4.000K, other colours on request.
- **Connection:** Possible with cable or without cable (1 mtr 3x 1.5 mm²). A 32mm hole in the fixture as standard for easy passage of your ground cable.
- **Variations:** At Timberlab, every luminaire is carefully produced for you. In addition to the standard options, we like to create variations for your application.

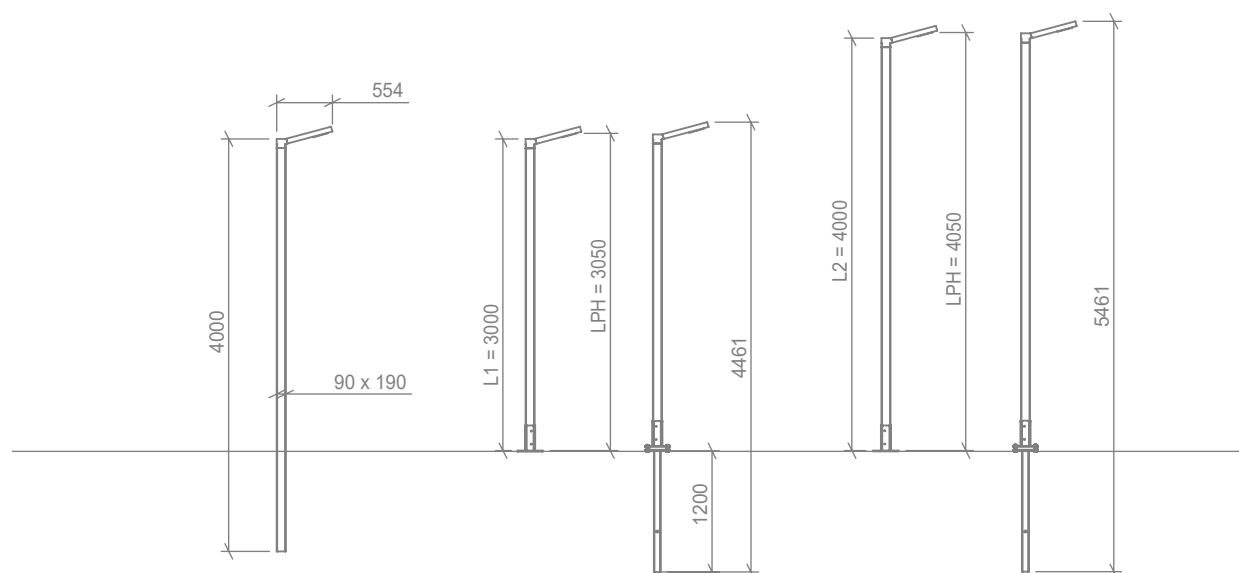

L = Length

LPH = Light height

	Weight	CO2 storage		Weight	CO2 storage		Weight	CO2 storage
Accoya	78 kg	92 kg		75 kg	69 kg		95 kg	92 kg



Only products indicated with the FSC® claim are FSC certified and come with our FSC-certificate number NC-COC-029615-KE. Only products indicated with the PEFC™ claim are 100% PEFC certified and come with our PEFC-certificate number NC-PEFC/COC-029615-FJ.