

Manual Tronco



Timberlab B.V.
Harskamperweg 32
6731 AB Otterlo

Follow this installation guide for a safe installation.

General

- Follow this installation guide for a safe installation.
- Installation and connection of the lighting armature should be done by a certified installer
- Disable main supply before starting installation activities!
- Timberlab is not responsible for adjustments of modifications on the armature
- The armature is not dimmable!
- The earthing will be (is) connected to the RVS lid
- We do not recommend the use of concrete mortar for filling in the area around the column. If necessary/derivable, depending on the type of soil a stabilising sand can be applied.

Maintenance advice

The wood does not require any maintenance. In the course of time, the wood will grey in a natural way. If a treatment is chosen, a moisture regulating surface treatment should always be applied. Ask your supplier for advice! If desired, the LED module can be cleaned with a soft brush.

Warranty

The product comes with a two-year guarantee. Wood is a natural product. This wood is, unless expressly stated otherwise, fresh, undried, sawn and/or planed (if applicable). No further woodworking was performed. There is always a chance of warping and/or (dry) cracking of the wood. This may occur upon delivery or later. This is not a production error but a natural characteristic of the wood. Warranties do not apply for this.

Product	Wood species	Certification	In ground/ post holder	Colour temperature	Version	Voltage	Variations
				K		VAC	
Tronco (25)	Chestnut (2)	N/A (0)	L1+ 2x LED (95)	2.200K (5)	with cable (1)	230V (1)	N/A (00)
		PEFC (2)	L2+3x LED (96)	2.700 (1)		12V-24V AC/DC	
				4.000 (3)			
				amber (4)			

The product code is generated by selecting the options and taking the number in brackets ().



21-03-2022



Tronco incl cable

1. Place


Place the Tronco on the ground



2. Connect

Make sure there is no voltage on the ground cables.

- Place te ground cables

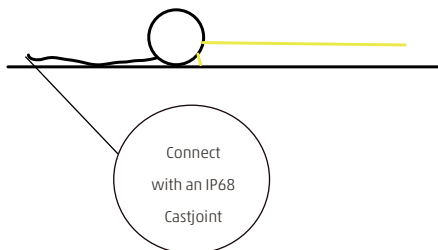

21-03-2022