

# FARO

Datasheet



The combination of wood and classic lighting. Solid wood combined with a stylishly cast aluminium armature. The FARO is an expansion within the classic series of the Timberlab assortment. The garden lighting can easily be installed. The armature is fitted with an e27 fitting. Light source not included. On request, the armature can also be supplied in bronze.



**timberlab**  
natural outdoor solutions

## SPECIFICATIES

- **Dimensions:** 150mm
- **IP grade:** IP54
- **Voltage:** 230 Volt
- **Fitting:** E27
- **Lifespan:** Every type of wood has its own durability class. More information can be found at "Wood species" & "Sustainability".


## OPTIONS

- **Wood species:** Larch/Douglas (only in combination with post support), oak, chestnut or Accoya
- **Certification:** FSC or PEFC
- **Post support:** The FARO is available with or without post support. See our "Post support" datasheet for all technical data.
- **Cable:** Available with 0,6mtr 3x 1,5mm<sup>2</sup> cable or a 32mm hole for an easy connection to your ground cable.
- **Variations :** All Timberlab products are unique. In addition to our standard options, we offer customization. Think of adding logos, sockets or different dimensions.



Only products indicated with the FSC® claim are FSC certified and come with our FSC-certificate number NC-COC-029615-KE. Only products indicated with the PEFC™ claim are 100% PEFC certified and come with our PEFC-certificate number NC-PEFC/COC-029615-FJ.

DIMENSIONS AND WEIGHT

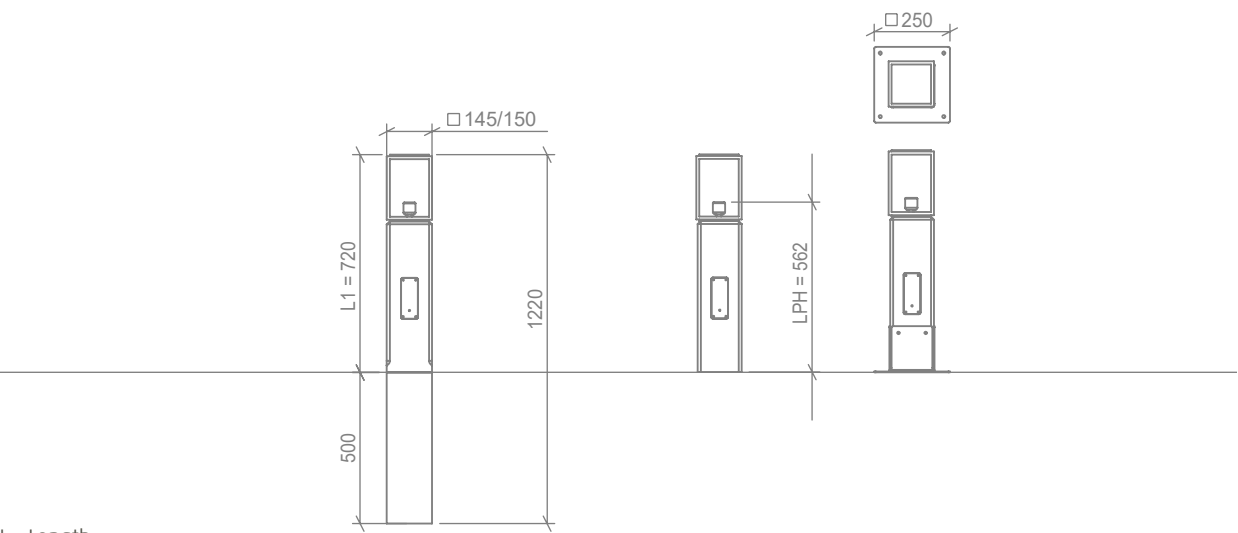

L = Length

Weight larch/douglas	n.a.	8 kg	12 kg
Weight chestnut	14 kg	8 kg	12 kg
Weight oak	17 kg	9 kg	13 kg
Weight Accoya	13 kg	7 kg	11 kg

CO2 storage larch/douglas	n.a.	10 kg	10 kg
CO2 storage chestnut	21 kg	11 kg	11 kg
CO2 storage oak	26 kg	13 kg	13 kg
CO2 storage Accoya	19 kg	11 kg	11 kg

PRODUCT CODE GENERATOR

Product family	Wood species	Certification	In ground / post support	Colour temp.	Type	Voltage	Variations
XX	X	X	XX	X	X	X	XX
19 = FARO	1= Larch 2= Chestnut 3= Oak 4= Accoya	0= N.a. 1= FSC 2= PEFC	00= Length 1 + 500mm in ground 95= Length 1 without post support 05= Length 1 with PH05	0 = N.a.	0= 32mm hole 1= Cable	1= 230 V	00

EXAMPLE

FARO, Chestnut, PEFC, Length 1 + 500mm in ground, Cable, 230V  
Product code: 19220001100  
Larch/Douglas in ground n.a.